

LifeOX® L

UVL – Low pressure UV

Compact and Efficient Design

 LifeTech



Expected life of UV lamp	16,000 hours
Technology (Series)	Low-pressure UV systems (254 nm)
Application	Indoor pools, Outdoor pools Whirlpools
Salt pool resistant (salt concentration up to 5 kg/m ³)	Yes
Pool volume up to	87 m ³
Rec. flow rate for disinfection	13 m ³

Max flow rate	23 m ³ /h
Power supply	Advanced Electronic Ballast, 100-240 V/50-60Hz
Connection	DN 75/65/50
Total power input of UV lamps	48-87 W
Wiper	Without wiper
Material	PVC-U with Stainless-steel UV shield Al316L inside




LifeOX® L

UVL – Low pressure UV

 LifeTech

Compact and Efficient Design

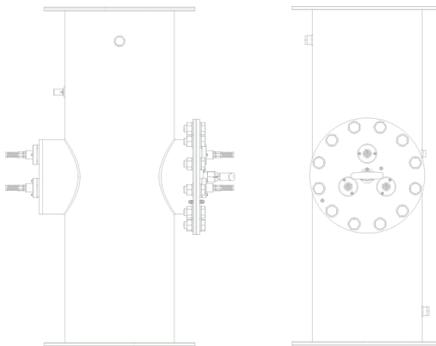

Variant	Rec. flow rate for disinfection	Max flow rate	Max volume (m ³)	Total power (W)
LifeOX® L100	13 m ³ /h	23 m ³ /h	48	48 / 1
LifeOX® L200	19 m ³ /h	23 m ³ /h	87	87 / 1

