

LifeUVC

UVL – Low pressure UV

Multi-lamp UV system for ultimate water care



Expected life of UV lamp	16,000 hours
Technology (Series)	Low-pressure UV systems (254 nm)
Application	Indoor pools, Outdoor pools, Whirlpools
Salt pool resistant (salt concentration up to 5 kg/m ³)	Yes
Max flow rate (UV dose 60 mJ/cm ²)	66 m ³ /h
Max flow rate	170 m ³ /h


Power supply	Advanced Electronic Power, 100-240 V/50-60Hz
Connection	2"-DN150
Total power input of UV lamps	48 - 522 W
Wiper	Without wiper
Material	Stainless-steel reactor 316(Salt water resistant)
Optional	Temperature sensor UV sensor



LifeUVC

UVL – Low pressure UV

Multi-lamp UV system for ultimate water care

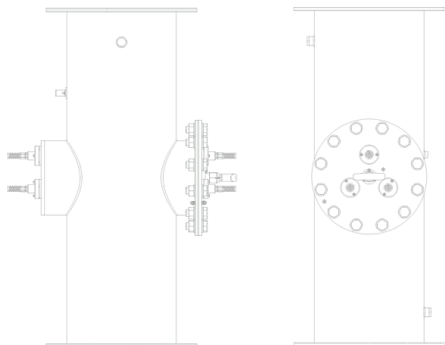

Variant	Connection	Max flow rate (UV dose 60 mJ/cm ²)	Max flow rate	Total power (W)
LifeUVC0148-16-NW-EB-BCD-G2	2"	3	20	48 / l
LifeUVC0187-16-NW-EB-BCD-G3	3"	6,5	49	87 / l
LifeUVC0287-16-NW-EB-BCD-G3	3"	13	49	174 / l
LifeUVC0387-16-NW-EB-BCD-G3-T	3"	20	49	261 / l
LifeUVC0387-20-NW-EB-BCD-DN100	DN100	25	80	261 / l
LifeUVC0487-20-NW-EB-BCD-DN125	DN125	34	120	348 / l
LifeUVC0587-20-NW-EB-BCD-DN125	DN125	42	120	435 / l
LifeUVC0687-20-NW-EB-BCD-DN150	DN150	50	170	522 / l
LifeUVC0687-27-NW-EB-BCD-DN150	DN150	66	170	522 / l

